



jimten.com

news

JANUARY 2018



EXTRA-FLAT SHOWER TRAY

Ø90, Ø62, Ø52 mm shower tray waste outlets

High flow rate up to 72 l/min

Reduced height

Removable grid

Anti-turn

Removable trap

One piece fixed water tightening joint



New click fixation system to the metallic flange.

3 points stainless steel flange. Anti-turn for shower trays up to 27 mm in thickness.

30 mm Removable trap.

JUNTAFIX
Co-injected flat joint version.

Reduced height
58 mm



More information at:
jimten.com



S-578



Ø 115

Stainless steel

Stainless steel. Polished

White ABS

S-577



Ø 115

Stainless steel grid

Stainless steel grid. Polished

S-579



S-578



Ø 85



Ø 70

Chrome ABS

White ABS

S-579



HIGH FLOW RATE WASTE

Ø90, Ø62, Ø52 mm shower tray waste outlets

**EN
274**

78 mm

50 mm



High flow rate up to 72 l/min.




JUNTAFIX
Co-injection flat joint.



Compact design with large benefits.



3 fixing points (Ø90) or 2 (Ø60/50) stainless steel flange. Anti-turn for shower trays up to 27 mm in thickness.



Removable trap, 50 mm water seal, easy to clean.

S-374



Ø 115

Stainless steel

Stainless steel. Polished

White ABS

S-373



Ø 115

Stainless steel grid

Stainless steel grid. Polished

S-574



S-374



Ø 85



Ø 70

Chrome ABS

White ABS

S-574



SPACE SAVING 360

Universal trap for sinks

Space saving

Its adjustable neck allows you to move the installation to the maximum, gaining space under the sink.

JUNTAFIX

Fast and safe installation thanks to its integrated joint system.



Installation at different heights

Suitable to sinks installed at different heights.

Multiple configurations

Height, depth and length adjustable allowing diferencie configurations.



S-559



S-558



A-136



▶ LINNUM WALL

Vertical gully for tiled showers

Available starting from 2nd quarter 2018

Easy installation

High flow rate. Up to 0.74 l/s

Adaptable to different cladding thicknesses




2 water seal options:



Removable trap

COVERS

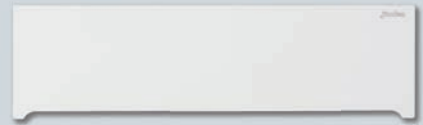

White ABS



Stainless steel




Stainless steel fill-in frame

6 Outlet options:

- Front outlet:
 - To be glued 40M
 - To be glued 40H/50M
 - 45° orientable outlet male 40/50mm
- Side outlet:
 - To be glued 40M
 - To be glued 40H/50M
 - 45° orientable outlet male 40/50mm



Led lighting option

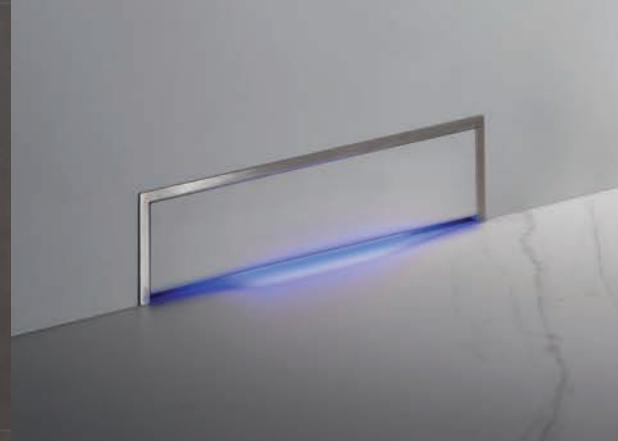

Stainless steel cover version



CAMALEON WITH DUAL SYSTEM

Advanced drainage systems

With DUAL dry trap system



New hair filter



New Square grid 100x100 mm



New range equipped with a dry trap which prevents odours even when the water seal has disappeared.

camaleon®

100/120/150mm


The Camaleon floor gullies range for tiled showers now has a number of new options which further improve its performance. New Square grid in 100x100, hair filter and removable dry trap.

More information at: jimten.com




GRID OPTIONS


100 mm				
	Classic	Cuadrícula	Ondas	Square
120 mm				
	Camaleon120	Cuadrícula	Soft	Square
150 mm				
	Camaleon150	Cuadrícula		

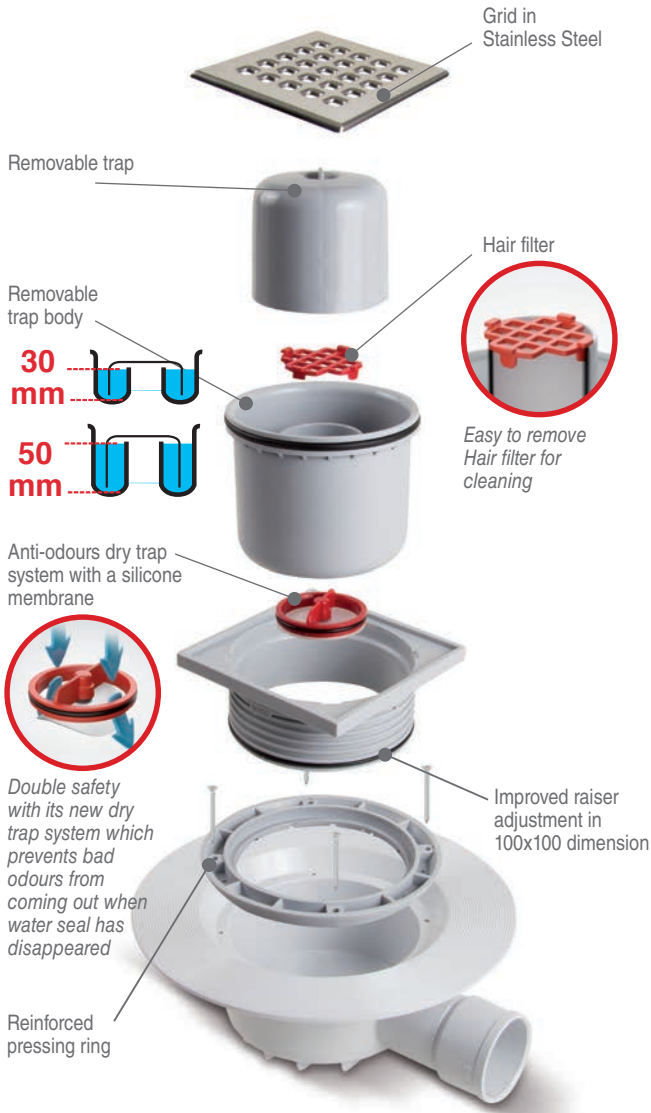

NEW DRY TRAP SYSTEM WHICH PREVENTS BAD ODOURS

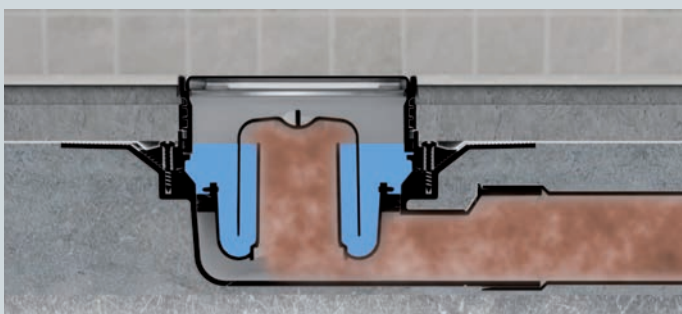

Water drainage creates an hydraulic seal which prevents bad odours from the piping coming into the bathroom.

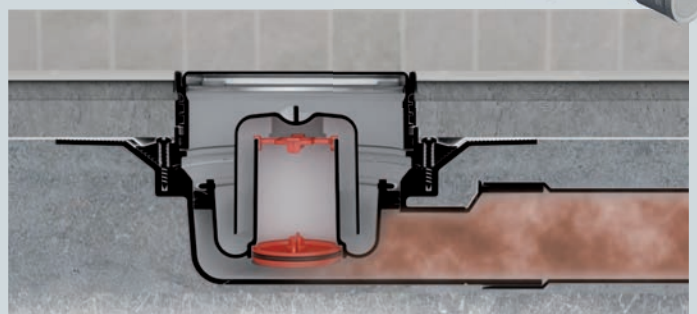

The valve prevents, even in case of hydraulic seal failure, bad odours from coming into the bathroom.

SANITARY MACERATORS CONCEALED INSTALLATION

CONCEALED INSTALLATION WITH SANITARY MACERATOR

New range of sanitary macerators and concealed cisterns, adapted to the latest market trends, silent, compact, concealable and powerful. They allow the installation of wall-hung toilets.

Exclusive caset system. The only one allowing easy maintenance without removing the toilet.

New design of the pumping unit allowing up to 6 m in vertical pump with a compact design.




WITH TEMPERED GLASS COVER



Model with 2 part frontal cover in tempered glass allow an easy caset register.


Available in 2 colours: black and white.

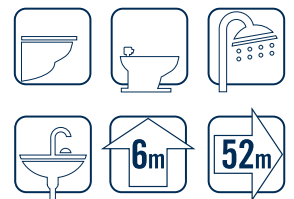

More information at:
jimten.com




SANITARY MACERATOR TO BE CONCEALED

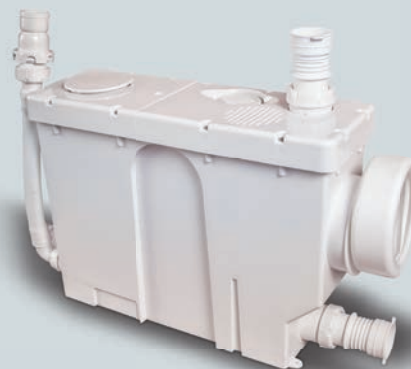

Sanitary macerator equipped with a non-return valve. Vertical outlet in 32 mm. With easy maintenance caset system. 470 W motor. Pumps up to 6 m in height or 62 m in horizontal. Silent.

FULL BORE 140 BALL VALVE

Smooth internal surface which prevents any damage on suspended solids while passing through the ball valve

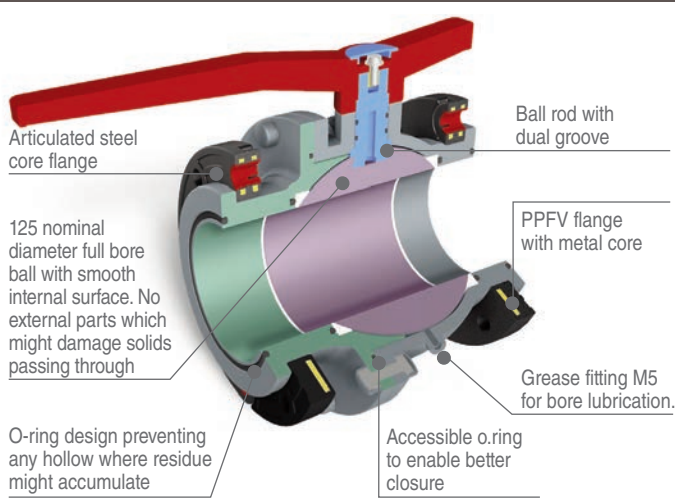

FULL SMOOTH BORE DESIGN.

PN6 - 125 mn nominal diameter corresponding to a 125mm PVC, 4 atm nominal pressure pipe.

Application: Agriculture, irrigation, fish growth industry.

- Minimal loss of pressure charge.

- The ball maintains the full diameter bore of the pipe without stretches, preventing blockages, damages to solids passing through, these characteristics make it ideal for the agro-alimentary industry. (Wine and olives production, preserved food industries...)



More information at:
jimten.com



AIR RELEASE VALVE DOBLE EFFECT

Low pressure closing



X-380 PATROL



The Patrol flouter high performance allows it to have quick answer to the negative pressures, protecting the net-pipe system from the adverse vacuum conditions such as other damages caused by the water column separating.

The filter cradle guaranties the low pressure closing, extending the installations lifetime since this prevents sucking impurities.

Air release valves X-380 PATROL 3/4" and 1"

The JIMTEN air release valves permit the control of air inside of the pipelines, assuring the safety and optimum hydraulic performance.



More information at:
jimten.com



▶ MANUAL FILTERS WITH PAFV* PLASTIC CLAMP



*PAFV (Reinforced polyamide with fiberglass).

Adaptable to all FILTMASTER filters



Clamping adjustable to open or close without using any tool.



Reinforced design that guarantees working pressure up to PN10. Made in resistant material to UV rays. Suitable for atmospheric corrosion environments C4.




With anti-vandal safety ring.

▶ VICMASTER UNION PAFV*

High resistant plyamide 2" . 3" and 4"




Jimten Vicmaster connections are manufactured in high resistant polyamide, guarantying a working pressure of PN16. The watertight seal at low and high pressure is achieved by an internal seal in high malleability EPDM.

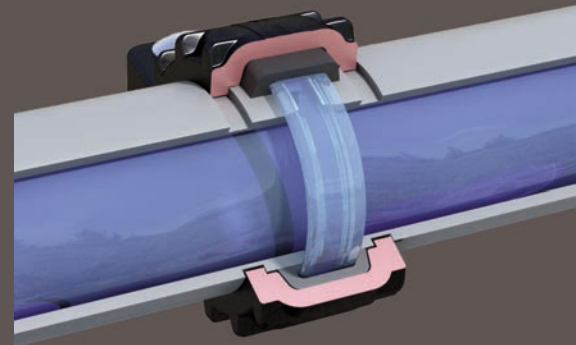

▶ NEW WEBSITE & APP

The most updated and usefull information

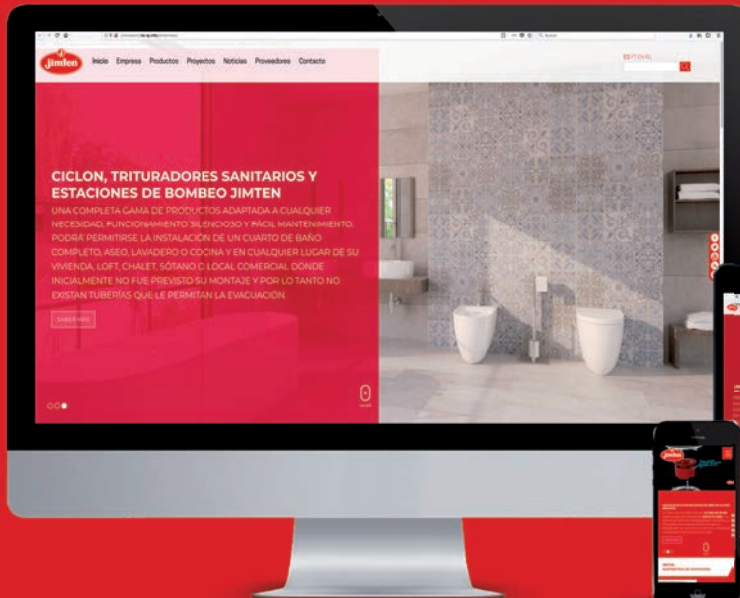

- Bar code scanner
- Product dimmensions
- Price list
- Available for iOS and Android



JIMTEN EXHIBITIONS 2018

JIMTEN will attend to the most representative European exhibitions. If you cannot attend those, you can find out our latest novelties in our Youtube channel.



EXHIBITION	PLACE	DATES
aquATHERM	Moscow (Russia)	February, 6th-9th
mostra convegno expocomfort	Milan (Italy)	March, 13th-16th
eima internazionale	Bologna (Italy)	November, 7th-11th

Follow us on **You Tube** : www.youtube.com/user/jimtenmarketing

jimten, s/a

Ctra. de Ocaña, 125. C.P. 03114
P.O. Box 5285. C.P. 03080
[t] +34 965 109 044
[f] +34 965 115 082
Alicante (Spain)



jimten.com

[t] +34 965 108 053
[e] comercial@jimten.com



Empresa registrada según norma



ER-0084/1996



GA-1999/0156



SST-0130/2016



an *Aliaxis* company