




Filters with plastic lock system

Suitable for atmospheric corrosion environments C4

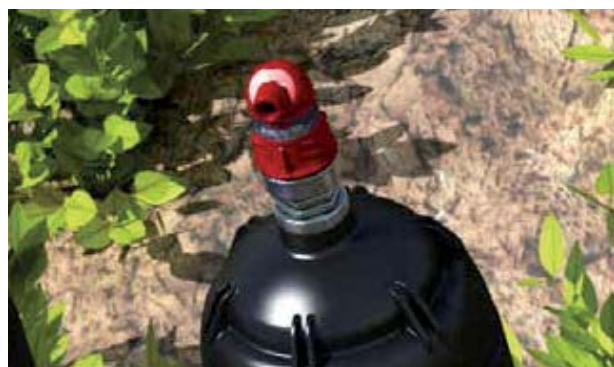


# Filters with plastic lock system



Easy to install plastic clamp

**NEW**

Clamping adjustable to open or close without using any tool.



Reinforced design that guarantees working pressure up to PN10.

Made in resistant material to UV rays.

Suitable for atmospheric corrosion environments C4

With anti-vandal safety ring.



Thanks to its modular conception, the plastic clamp can be installed in all FILTMASER filters.



**X-349 X-350 X-351 X-352 X-353**

sky blue 25 microns	green 50 microns	blue 100 microns	red 130 microns	yellow 200 microns	conexion		
97804	97805	97806	97807	97808	BBB	1	4256
97809	97810	97811	97812	97813	NNN	1	4256

2" standard disc filter.

**X-329 X-330 X-331 X-332 X-333**

sky blue 25 microns	green 50 microns	blue 100 microns	red 130 microns	yellow 200 microns	conexion		
97669	97675	97681	97687	97693	BBB	1	4140
97670	97676	97682	97688	97694	VVB	1	4140
97671	97677	97683	97689	97695	VBV	1	4140
97672	97678	97684	97690	97696	NNN	1	4140
97673	97679	97685	97691	97697	VVN	1	4140
97674	97680	97686	97692	97698	VNV	1	4140

2" disc filter.

**X-334 X-335 X-336 X-337 X-338**

sky blue 25 microns	green 50 microns	blue 100 microns	red 130 microns	yellow 200 microns	conexion		
97699	97705	97711	97717	97723	BBB	1	4139
97700	97706	97712	97718	97724	VVB	1	4139
97701	97707	97713	97719	97725	VBV	1	4139
97702	97708	97714	97720	97726	NNN	1	4139
97703	97709	97715	97721	97727	VVN	1	4139
97704	97710	97716	97722	97728	VNV	1	4139

2" long disc filter.

**X-339 X-340 X-341 X-342 X-343**

sky blue 25 microns	green 50 microns	blue 100 microns	red 130 microns	yellow 200 microns	conexion		
97729	97735	97741	97747	97753	BBB	1	4139
97730	97736	97742	97748	97754	VVB	1	4139
97731	97737	97743	97749	97755	VBV	1	4139
97732	97738	97744	97750	97756	NNN	1	4139
97733	97739	97745	97751	97757	VVN	1	4139
97734	97740	97746	97752	97758	VNV	1	4139

3" disc filter.



Size	Code		
2" - 3"	97759	1	A-2

Plastic clamp.





Filters with plastic lock system  
Suitable for atmospheric corrosion environments C4

## Filters range

### FILTMASTER



#### Low flow FILTMASTER filters range (up to 15 cbm/h)

¾", 1", 1-¼", and 1-½" NPT and BSP threaded.  
Filtering Elements: AISI 304 stainless steel screen with high resistance polypropylene frame / Polypropilene discs in 100 and 130 microns.  
Body injected in reinforced polyamide. PN 10.  
Drainage outlet ½" and ¾".

#### FILTMASTER manual filters

- |                          |                                           |
|--------------------------|-------------------------------------------|
| 2" standard disc filter. | 3" double body disc super compact filter. |
| 2" disc filter.          | 3" double body disc compact filter.       |
| 2" long disc filter.     | 3" double body disc filter.               |
| 3" disc filter.          | 4" double body disc super compact filter. |
| 2" screen filter.        | 4" double body disc compact filter.       |
| 2" long screen filter.   | 4" double body disc filter.               |
| 3" screen filter.        |                                           |

#### FILTMASTER hydrocyclonic filters

- 2" standard hydrocyclonic disc filter.
- 2" hydrocyclonic disc filter.
- 2" long hydrocyclonic disc filter.
- 3" hydrocyclonic disc filter.
- 3" hydrocyclonic double body disc compact filter.
- 4" hydrocyclonic double body disc compact filter.

#### FILTMASTER automatic filter

- 2" automatic disc filter.
- 3" automatic disc filter.
- 3" double body automatic disc filter.
- 4" double body automatic disc filter.



**MasteONE.** 2" monofilter selfcleaning filtering station.

**jimten, s/a**

CTRA. DE OCAÑA, 125 C.P. 03114  
5285 C.P. 03080  
+ 34.965.10.90.44  
Fax. + 34.965.11.50.82  
ALICANTE (ESPAÑA)



[www.jimten.com](http://www.jimten.com)

Empresa registrada según norma



ER-0084/1996



GA-1999/0156

an *OAliaxis* company